

# SZ-30-36MFE

## Warranty


- ◆ 5 years Manufacturer Warranty
- ◆ Warranty on Electrical Performance :  
5 years 80% of power output

## Manufacturing

- ◆ Original cell sorting system ensures the best electric cell match
- ◆ EL-Testing before packing
- ◆ Comprehensive module power testing, 100% positive output tolerance guaranteed

## Performance

- ◆ High module conversion efficiency
- ◆ High-quality cells and partial-cell design lower series resistance and reduce power degradation
- ◆ Optimized performance under low light conditions. The integrated bypass-diodes allow the panel to work when partially shaded
- ◆ Internal aluminum sheet improves the durability by decreasing the risk of micro-cracks on cells
- ◆ IP67 rated junction box, reliable cables and standard MC4 connectors improve the stability

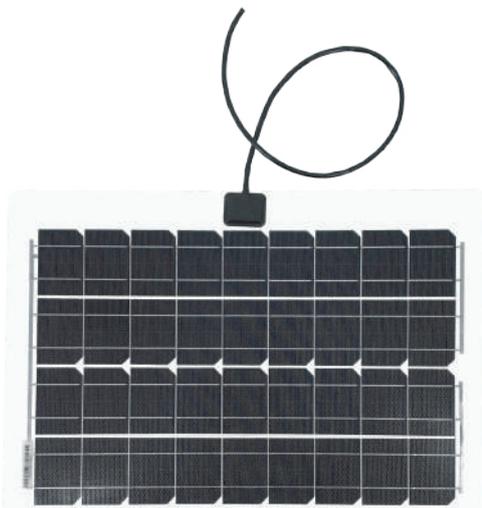

## Mechanical Data

Standard Test Conditions AM=1.5, E=1000W/m<sup>2</sup>, TC=25°C

Nominal Power	30W
Cell Type/Efficiency	Monocrystalline / 21.20%
Cell Arrangement	36 (4*9)
Maximum Power Current (Impp)	1.65A
Maximum Power Voltage (Vmpp)	18.20V
Open-circuit Voltage (Voc)	21.50V
Short-circuit Current (Isc)	1.98A
Maximum System Voltage	100V
Output Tolerance	+3%
Cable	650mm / 2.5mm <sup>2</sup>
Connector Type	MC4 / MC4 Compatible
Module Structure	ETFE / Aluminum Sheet/ EVA / Backsheet (White)
Junction box rating	≥ IP67
Number of Diodes	One
Working Temperature	-40°C~+80°C

## Packaging

Module Dimensions	560*380*3mm
Module Weight	1.50kg
Package	Single Package
Pieces per Pallet	56
Gross Weight per Pallet	104kg
Pallet Dimensions	1270*1100*710mm

**SOLMAX NEW ENERGY B.V.**  
 Address: Zonnebaan 23, 3542 EB Utrecht, the Netherlands.  
 Tel:+31-307 855 708  
 E-mail: info@solarfam.nl

